

New Fuzzy Logic System for Controlling Multiple Traffic Intersections with Dynamic Phase Selection

by Muhammad Aria

Submission date: 11-May-2020 12:25PM (UTC+0700)

Submission ID: 1321423095

File name: M_Aria_2019_JESTEC_New_Fuzzy_Logic_System.docx (787.5K)

Word count: 3855

Character count: 18983

New Fuzzy Logic System for Controlling Multiple Traffic Intersections with Dynamic Phase Selection

ORIGINALITY REPORT

21%

SIMILARITY INDEX

23%

INTERNET SOURCES

4%

PUBLICATIONS

7%

STUDENT PAPERS

PRIMARY SOURCES

1

search.unikom.ac.id

Internet Source

18%

2

Submitted to Universitas Diponegoro

Student Paper

3%

Exclude quotes

Off

Exclude matches

< 2%

Exclude bibliography

On

NEW FUZZY LOGIC SYSTEM FOR CONTROLLING MULTIPLE TRAFFIC INTERSECTIONS WITH DYNAMIC PHASE SELECTION AND PEDESTRIAN CROSSING SIGNAL

MUHAMMAD ARIA

1
Electrical Engineering Department, Universitas Komputer Indonesia,
Jl. Dipati Ular 102-116, Bandung 40132, Indonesia
E-mail: muhammad.aria@email.unikom.ac.id

Abstract

The purpose of this paper was to demonstrate a distributed fuzzy inference system for controlling traffic lights signal from multiple intersections by selecting dynamic phase and controlling signals for pedestrian crossings. The controller adaptively adjusted the phase sequences and phase lengths to optimize the vehicle's movement to go straight or turn right and to arranged opportunities for pedestrians to cross the street. At each intersection, there was a fuzzy system that can communicate with other fuzzy systems in the connecting intersection. Each fuzzy system consisted of three main modules: The green phase, red phase, and decision modules. A traffic intersection simulator was developed to test the performance of the fuzzy controller. The proposed method was compared to two other traffic light controllers: Preset-Cycle-Times (PCT) and Vehicle-Actuated (VA) controllers. The measured performance index is the average delay time of vehicles and pedestrians. The simulation results revealed better performance of the proposed controller compared to the PCT and VA controllers. However, in heavy traffic conditions, only a few improvements have been made. This finding indicates that the fuzzy controller provides better traffic control performance than the VA and PCT controller that allows vehicles and pedestrians to have shorter waiting time at the intersection that applies this fuzzy controller.

Keywords: Distributed controller, Dynamic phase selection, Fuzzy inference system, Multiple traffic intersection, Pedestrian signal control.

1. Introduction

Traffic congestion is very influential on the quality of life, environmental quality, road safety, and travel time [1]. The use of effective traffic signal controller can be one way to reduce traffic congestion. Common traffic signal controllers are Preset Cycle Time (PCT) controller and Vehicle Actuated (VA) controllers [2]. In the PCT, the duration of the signal and length phases is made constant, while in the VA system, the duration of the green phase will be determined by checking whether there is still a vehicle on a link or the maximum time of the green phase has been reached. The presence of many traffic officers during busy traffic hours indicates that current traffic light controllers are still insufficient. As the traffic flow generally contains uncertainty, fuzzy controllers can be an alternative to manage it because the fuzzy system has an advantage in dealing with uncertainty problems [3].

Researches on fuzzy logic applications on traffic light control have been widely conducted. Niittymäki and Pursula [4] reported that, based on the simulation results, the use of fuzzy logic controller can shorten the vehicle delay and lower stopping percentage of the vehicle. Lee and Lee-Kwang [5] proposed a fuzzy controller for several intersections. Each controller can interact with other controllers nearby. Khalid et al. [6] continued the research carried out by Lee and Lee-Kwang [5] by testing the system of real data collected from real intersections. Lai et al. [7] proposed the use of the adaptive fuzzy neural inference system (ANFIS) on the isolated multi-path intersection. They reported that the efficiency and performance of ANFIS controllers is better than vague. Aria [8] proposed the use of fuzzy type 2 controllers to control traffic lights at several adjacent intersections and proved that their proposed controller is better than fuzzy type 1. Aria [9] proposed the use of a fuzzy system to dynamically control the phase of a traffic light in order to optimize the vehicle to move either in a straight line or in a right turn. Olanrewaju et al. [10] discussed the integration of fuzzy systems in the control of traffic lights and traffic lights for pedestrians to cross the street. However, the system has only been applied in the case of a straight road and has not yet been applied in the use of crossroads. No previous research has particularly discussed traffic lights with dynamic phase control to optimize vehicles for straight or right turn movements that can be implemented to control multiple adjacent intersections and to control traffic lights for pedestrians to cross the street.

On the basis of previous work [8, 9], the contribution of this article was to propose a new architecture of fuzzy inference system (FIS) for the control of complex traffic intersections with dynamic phase control to optimize vehicles to move in a straight line or turn right. The FIS is also able to control the light signal so that the pedestrian crosses the street. The fuzzy system consists of three modules: green phase, red phase and decision modules. The fuzzy system is installed at each intersection and can communicate with other fuzzy systems present at the nearby intersection. The proposed controller is then tested using a simulator and its performance is then compared to the PCT and VA controllers.

2. Method

2.1. Vehicles and pedestrian detectors

To get information about the number of vehicles on a lane, two detectors were used: The rear detector that was placed on the back of the link and the front detector that was located near the intersection. These two detectors were used to count how many

vehicles are in a lane. Meanwhile, to get information about pedestrians' waiting times to cross the street, a button called Push-to-Walk Button was employed. Pedestrians who want to cross must press the button first. The pedestrian waiting times were gained by measuring how long it has passed since the button was pressed.

Figure 1 shows the example of the location of the detectors and Push-to-Walk Button. It was assumed that the inside lane was for the right-turning vehicle. The outside is for the straight-moving vehicle.

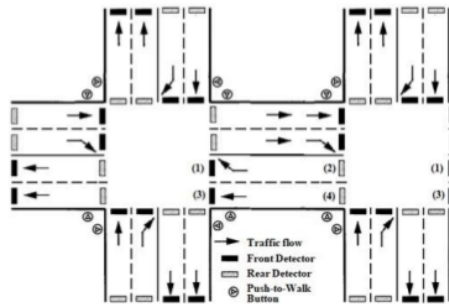


Fig. 1. Example location of the detector and push-to-walk button.
 (1) Front sensor to detecting a turning vehicle, (2) Rear sensor to detect a turning vehicle, (3) Front sensor to detecting a straight vehicle and
 (4) Rear sensor to detecting a straight vehicle.

2.2. Controller overview

The controller features were to reduce the waiting time of the waiting vehicle (either going straight or turning), to avoid heavy traffic jams at the intersection, and to reduce the waiting time of the pedestrian to cross the street. The controller adjusted the phase length and phase sequence adaptively based on traffic conditions [11, 12]. As proposed by previous studies by Lee et al. [5], Khalid et al. [6], Aria [8, 9], the controller used three fuzzy modules namely decision phase, red phase and green module.

2.3. Green phase module

The green phase module calculates the urgency of the green phase to extend the time of this phase. The input is Pedestrian Waiting Time (PWT), Queue Num (QN), and Front Num (FN). The output is the Extend Degree of Phase (EDP). The definition of QN and FN is the same as that given by Lee and Lee-Kwang [5] and Aria [9]. PWT is time duration the pedestrians wait to cross. EDP is the level of urgency to extend the green phase.

If there is more than one traffic flow that has a green phase, this module evaluates the extend degree of each of these traffic flows. That Extend Degree is called Extend Degree of a Traffic Flow (EDT). The minimum value of all EDTs becomes EDP values of the phase.

Figure 2 shows the traffic phase from west to east and from east to west. EDT for each traffic flow was evaluated. For traffic from east to west QN (EW) is the

1 number of vehicles waiting in the straight-going lanes of the east link, FN (W) is the number of vehicles waiting at the west link and PWT (E&W) is the length of time the pedestrians wait to cross both on east and west link.

Using green phase Module, we get EDT (EW) value. The same process is also applied to traffic from west to east, and we will get EDT (WE). The EDP of this phase is the minimum value of EDT (EW) and EDT (WE).

This module has 125 rules. Based on studies by Lai et al. [7] and Aria [8, 9], we developed a rule created by adding PWT input. Rules and examples from this module are shown in Table 1, and the fuzzy Membership Function (MF) of QN, FN, PWT, and EDT is shown in Fig. 3. The urgency of this phase will decrease if QN is small.

1 If there are many vehicles at the next intersection, this will make the urgency of this phase. This will decrease and reduce the number of vehicles that will enter the already crowded link. If pedestrians have waited long enough, the urgency of this phase to remain green will also decrease.

Table 1. Rules examples of the green phase module.

Input variable			Output	Input variable			Output
QN	FN	PWT	EDT	QN	FN	PWT	EDT
Z	S	M	Z	Z	S	VL	Z
S	S	M	S	S	S	VL	S
M	S	M	M	M	S	VL	S
L	S	M	L	L	S	VL	S
VL	S	M	L	VL	S	VL	S
Z	L	M	Z	Z	VL	VL	Z
S	L	M	S	S	VL	VL	Z
M	L	M	S	M	VL	VL	Z
L	L	M	S	L	VL	VL	Z
VL	L	M	S	VL	VL	VL	Z

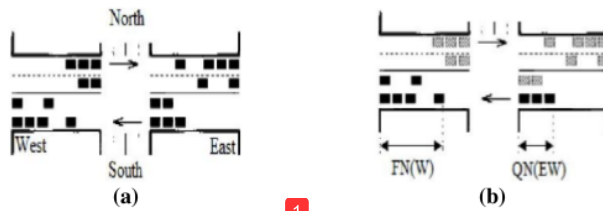


Fig. 2. QN and FN illustration for evaluation the traffic from east: (a) Traffic conditions and (b) QN and FN of the traffic from east to west.

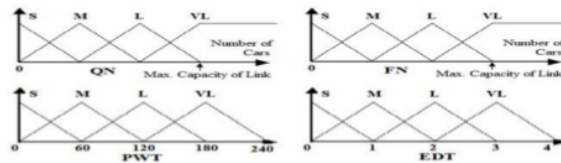


Fig. 3. Fuzzy MF of QN, FN, PWT and EDP.

2.4. Red phase module

This module calculated the Urgency Degree of a Phase (UDP) of a red phases to get green. UDP was obtained by evaluating the degree of urgency of all traffic flow associated with these phases. The Urgency Degree of a Traffic flow (UDT) represents the conditions of the traffic flows. The minimum value of all UDTs will be UDP value of these phases. The candidate for the next green phase is the phase with the highest UDP value. This module has four inputs: QN, FN, PWT and Red Time (RT). RT is the time duration of the vehicle waits because of a red signal.

The fuzzy rule of the red phase module is generated, in which, UDT will increase proportionately in accordance with the increase in QN and RT values. However, if the FN grows, UDT will decrease. Thus, it will reduce the number of vehicles entering the next intersection. PWT was also employed as input since the proposed fuzzy controller will select the next phase dynamically. It is possible that the selected phase will still prevent pedestrians from crossing. Thus, at such a phase, the red phase urgency will decrease as PWT values increase in that phase. Table 2 shows some examples of rules from this module.

The fuzzy MF of QN and FN in this module is the same as the fuzzy MF of QN and FN in the green phase module. The fuzzy MF of PWT and RT in the red phase module are the same as the fuzzy MF of PWT in the green phase module. And, the fuzzy MF of UDT in the red phase module is the same as the fuzzy MF of EDT in the green phase module.

Table 2. Rules examples of the red phase module.

Input variable	Output				Input variable	Output			
	FN	PWT	RT	UDT		FN	PWT	RT	UDT
Z	S	M	M	Z	Z	S	M	VL	Z
S	S	M	M	S	S	S	M	VL	L
M	S	M	M	M	M	S	M	VL	VL
L	S	M	M	L	L	S	M	VL	VL
VL	S	M	M	L	VL	S	M	VL	VL
Z	L	M	M	Z	Z	S	L	M	Z
S	L	M	M	S	S	S	L	M	S
M	L	M	M	S	M	S	L	M	S
L	L	M	M	S	L	S	L	M	S
VL	L	M	M	S	VL	S	L	M	M

2.5. Decision module

Input decision module is the output of the red phase module (UDP) and the green phase module (EDP). This module will make a decision either to change or extend the green signal. If UDP is higher than EDP, it means that traffic conditions for the next phase are heavier than the current green phase. Therefore, this module will give a green signal to the phase with the highest UDP value.

2.6. Signal phases proposal and schematic diagram of the controller

Basically, controlling traffic signals is a process to determine, which phase should be activated in the next cycle and how long it should take [5]. In the case of a four-way intersection, 16 alternative phases are possible to choose as shown in Fig. 4. To create a complete cycle of traffic signals, only a few phases were selected from the 16 phases

so that all traffic flows can move forward. The fuzzy system will choose which phase will be activated in a cycle in an adaptive way, adapting to the existing traffic density conditions. Figure 5 shows an example of a schematic controller diagram if phase 1 of Fig. 4 is the green phase now.

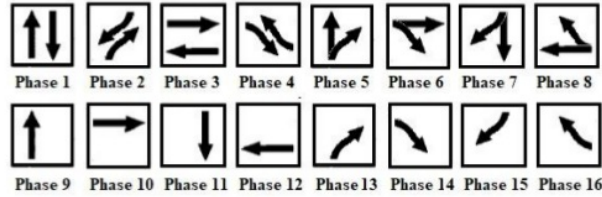


Fig. 4. Possible phases in a four-way intersection.

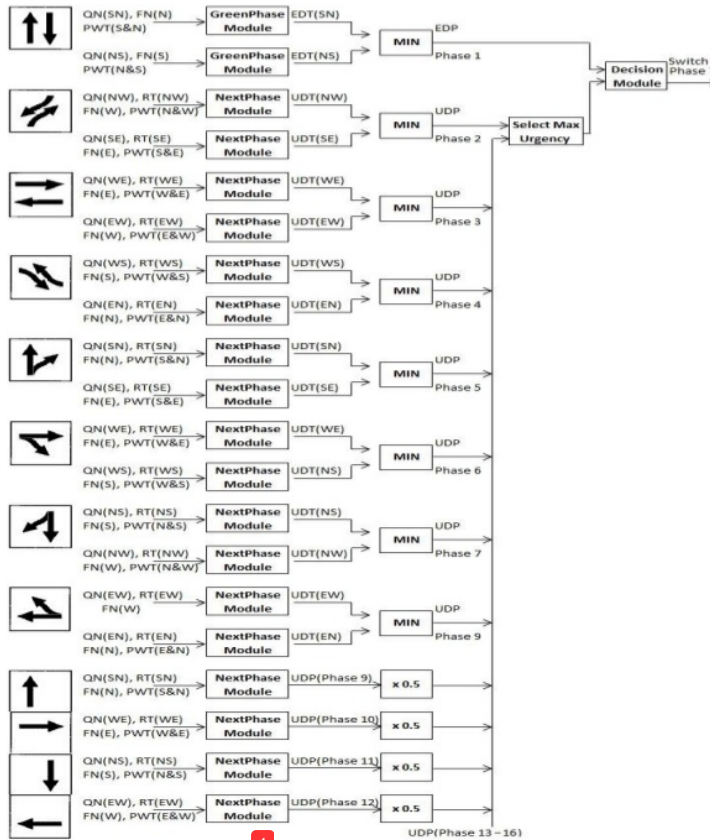


Fig. 5. Schematic diagram example of controller if green phase is phase 1 of Fig. 4.

3. Results and Discussion

3.1. Simulator

To test the proposed controller, a simulator consisting of nine intersections was developed. Every intersection was connected with other intersection in four directions. Each link had two directions. Meanwhile, the simulator had four input links: northern input link (top), south input link (bottom), eastern input link (right), and western input link (left). The vehicles and pedestrian were generated according to the plan provided from the input links entered into the links. In testing the simulator, the following assumptions were used:

- 30% of the number of vehicles on a link will turn right
- In addition to vehicles, there are also pedestrians crossing.
- For every intersection, the number of pedestrians generated on each link is 5 pedestrians /minute.

To generate traffic flow, the following car model proposed by General Motors Inc. was used [13]. In the model of implementation, the study employed the following conditions:

- The driver will react to the change in vehicle speed in front of it after a time gap called reaction time.
- The acceleration, speed, and position of the vehicle will be updated at certain time interval
- The speed and position of the vehicle is governed by Newton's laws of motion

The equations used are as follows:

$$v_n^t = v_n^{t-\Delta t} + a_n^{t-\Delta t} \times \Delta t \quad (1)$$

$$x_n^t = x_n^{t-\Delta t} + v_n^{t-\Delta t} \times \Delta t + \frac{1}{2} a_n^{t-\Delta t} \Delta t^2 \quad (2)$$

$$a_{n+1}^t = \left[\frac{\alpha_{i,m} (v_{n+1}^t)^m}{(x_n^{t-\Delta T} - x_{n+1}^{t-\Delta T})^l} \right] (v_n^{t-\Delta T} - v_{n+1}^{t-\Delta T}) \quad (3)$$

where v is the vehicle velocity, x is movement distance, a is the vehicle acceleration, Δt is the time interval, Δ is the reaction time, m is the speed exponent with intervals -2 to +2, l is the distance headway exponent with intervals from -1 to +4, and α is the sensitivity coefficient. The parameters are then calibrated using real data.

3.2. Simulation results and discussions

The proposed controller was compared to the PCT controller and the VA controller. The simulation was carried out under 9 traffic conditions:

- Cases that the traffics of all input links are the same:
 - 600 vehicles/hour
 - 700 vehicles/hour
 - 800 vehicles/hour
 - 900 vehicles/hour
 - 1000 vehicles/hour

- 1100 vehicles/hour
- Cases where traffic conditions change every 20 minutes
- Case with light traffic
Table 3 shows the number of vehicles generated on each input link for light traffic conditions.
- Cases with normal traffic
Table 4 shows the number of vehicles generated on each input link for medium traffic conditions.
- Cases with heavy traffic (vehicles/hour)
Table 5 shows the number of vehicles generated on each input link for heavy traffic conditions.

Table 3. Case with light traffic conditions (vehicle/hour).

Time	0 - 20	20 - 40	40 - 60	60 - 80
North	700	700	700	700
West	600	600	500	600
East	500	500	600	500
South	700	700	700	400

Table 4. Case with medium traffic conditions (vehicle/hour).

Time	0 - 20	20 - 40	40 - 60	60 - 80
North	900	850	900	900
West	800	950	800	800
East	900	950	750	900
South	750	850	900	950

Table 5. Case with heavy traffic conditions (vehicle/hour).

Time	0 - 20	20 - 40	40 - 60	60 - 80
North	1100	1100	1100	1100
West	1000	1050	1000	1000
East	1100	1000	1050	1000
South	1000	1100	1100	1100

The measured performance index is the amount of the average delay time of the vehicles and the pedestrians. Tables 6 and 7 summarise the obtained simulation results. Each table displays the average delay time in seconds.

The proposed method has shown good performance in all cases. Under stable traffic conditions, the proposed controller has shown some improvement in the average delay time from 3.50 to 8.60% via the VA controller and from 4.90 to 16.40% via the PCT controller. Under time varying conditions, an improvement in the average delay time of 1.10 to 7.90% was obtained via the VA controller and from 5.70 to 12.40% via the PCT controller. Only in heavy traffic conditions, the proposed method showed only a slight improvement (3.50 - 5.70%). This indicates that vehicles will wait with a shorter wait time at the intersection that applies the fuzzy controller.

From the findings, it can be concluded that the simulation results of the proposed fuzzy controller have shown better performance compared to those of the PCT and AV controllers in light and medium conditions. Previous reports also reported similar results regarding the superiority of fuzzy controllers compared to PCT and AV controllers [5, 6, 8, 9]. This is also in accordance with Shinde [14] who reported that the AV and PCT Controllers could cause unnecessary waiting times.

However, in intersections with heavy traffic conditions, only the proposed controller made a few improvements. This is because the number of vehicles has reached maximum capacity from intersections so that only a few possibilities for improvements can be made. Similar things were reported by Lee and Lee-Kwang [5] and Aria [8, 9]. Fuzzy controllers then will choose the most optimal phase from the 16 available phase options (as shown in Fig. 4) and its duration to minimize the waiting time of vehicles and pedestrians.

Table 6. Average delay time for case 1.

Case	Fuzzy controller	VA controller	PCT controller	Improvement than VA controller	Improvement than PCT controller
1a	44.9	49.1	53.7	8.4%	16.4%
1b	53.1	57.3	58.2	7.3%	8.8%
1c	61.1	66.4	68.8	8.0%	11.2%
1d	65.7	71.3	73.8	7.9%	11.0%
1e	90.4	94.4	95.1	4.2%	4.9%
1f	99.6	103.2	105.3	3.5%	5.4%

Table 7. Average delay time for case 2.

Case	Fuzzy controller	VA controller	PCT controller	Improvement than VA controller	Improvement than PCT controller
2a	49.0	53.2	54.6	7.9%	10.3%
2b	63.7	68.8	72.7	7.4%	12.4%
2c	94.9	98.8	100.6	3.9%	5.7%

4. Conclusions

This paper proposed a fuzzy system traffic controller to control multiple adjacent intersections to optimize the speed of the vehicle going straight or straight. In addition, the fuzzy controller has also optimized the possibility for pedestrians to cross. The controller not only managed local traffic, but also worked with its neighbors from which the controller obtains information in addition to the detectors.

The results of the simulation in light and medium conditions revealed that the proposed controller performed better than the AV and PCT controllers. The data obtained concerning the measured performance index showed that the proposed controller improved the average delay time from 3.5% to 8.6% via the VA controller and from 4.9% to 16.4% via the PCT controller in stable traffic conditions. Under conditions varying over time, the improvement in the average delay time is from 3.9% to 7.9% via the VA controller and from 5.7% to 12.4% via the PCT controller. However, under heavy traffic conditions, the proposed controller showed only a slight improvement.

References

1. Harriet, T.; Poku, K.; and Emmanuel, A.K. (2013). An assessment of traffic congestion and its effect on productivity in urban Ghana. *International Journal of Business and Social Science*, 4(3), 225-234.
2. Shahraki, A.A.; Shahraki, M.N.; and Mosavi, M.R. (2013). Design and simulation of fuzzy controller for a busy intersection. *Proceedings of the International Conference on Computer Applications Technology (ICCAT)*. Sousse, Tunisia, 1-6.
3. Wagner, C.; and Hagra, H. (2010). Uncertainty and type-2 fuzzy sets and system. *Proceedings of the IEEE 10th UK Workshop on Computational Intelligence (UKCI)*. Colchester, United Kingdom, 1-5.
4. Niitymäki, J.; and Pursula, M. (2000) Signal control using fuzzy logic. *Fuzzy Sets and Systems*, 116(1), 11-22.
5. Lee, J.-H.; and Lee-Kwang, H. (1999). Distributed and cooperative fuzzy controllers for traffic intersections group. *IEEE Transactions on Systems, Man, and Cybernetics, Part C: Application and Reviews*, 29(2), 263-271.
6. Khalid, M.; Liang, S.C.; and Yusof, R. (2004). Control of a complex traffic junction using fuzzy inference. *Proceedings of the IEEE 5th Asian Control Conference*. Melbourne, Victoria, 1544-1551.
7. Lai, G.R.; Che Soh, G.; Sarkan, H.M.; Abdul Rahman, R.Z.; and Hassan M.K. (2015). Controlling traffic flow in multilane-isolated intersection using ANFIS approach techniques. *Journal of Engineering, Science and Technology (JESTEC)*, 10(8), 1009-1034.
8. Aria, M. (2011). Intelligent traffic light control based on interval type 2 fuzzy system. *Majalah Ilmiah UNIKOM*, 8(2), 203-216.
9. Aria, M. (2017). Fuzzy logic system for coordinated traffic signal control with dynamic phase selection, *Jurnal Ilmiah Telekomunikasi, Kendali dan Elektronika Terapan (TELEKONTRAN)*, 5(1), 1-10.
10. Olanrewaju, O.M.; Obiniyi, A.A.; and Junaidu, S.B. (2017). Fuzzy logic concept for safety driven vehicle pedestrian traffic interaction. *International Journal of Computer Application*, 167(1), 24-28.
11. Aziz, M.; Huda, M.; Nandiyanto, A.B.D.; and Abdullah, A.G. (2018). Opportunity of frequency regulation using electric vehicles in Denmark. *Journal of Engineering, Science and Technology (JESTEC)*, 13(6), 1700-1712.
12. Soegoto, E.S. (2018). Radio frequency identification (RFID) smart card on parking system as e-business prospect. *Journal of Engineering, Science and Technology (JESTEC)*, 13(6), 1690-1699.
13. Mathew, T.V. (2014). Car following models. *Transportation Systems Engineering*, 14, 1-8.
14. Shinde, S.M. (2017). Adaptive traffic light control system. *Proceedings of the 1st International Conference on Intelligent System and Information Management (ICISIM)*. Aurangabad, India, 300-306.