

MODERN OPERATING SYSTEMS

Third Edition
ANDREW S. TANENBAUM

Chapter 6 Deadlocks

Preemptable and Nonpreemptable Resources

Sequence of events required to use a resource:

1. Request the resource.
2. Use the resource.
3. Release the resource.

Resource Acquisition (1)

```
typedef int semaphore;  
semaphore resource_1;
```

```
void process_A(void) {  
    down(&resource_1);  
    use_resource_1( );  
    up(&resource_1);  
}
```

(a)

```
typedef int semaphore;  
semaphore resource_1;  
semaphore resource_2;
```

```
void process_A(void) {  
    down(&resource_1);  
    down(&resource_2);  
    use_both_resources( );  
    up(&resource_2);  
    up(&resource_1);  
}
```

(b)

Figure 6-1. Using a semaphore to protect resources.
(a) One resource. (b) Two resources.

Resource Acquisition (2)

```
typedef int semaphore;
    semaphore resource_1;
    semaphore resource_2;

void process_A(void) {
    down(&resource_1);
    down(&resource_2);
    use_both_resources( );
    up(&resource_2);
    up(&resource_1);
}

void process_B(void) {
    down(&resource_1);
    down(&resource_2);
    use_both_resources( );
    up(&resource_2);
    up(&resource_1);
}
```

Figure 6-2. (a)
Deadlock-free code.

(a)

Resource Acquisition (3)

Figure 6-2. (b) Code with a potential deadlock.

```
semaphore resource_1;
semaphore resource_2;

void process_A(void) {
    down(&resource_1);
    down(&resource_2);
    use_both_resources( );
    up(&resource_2);
    up(&resource_1);
}

void process_B(void) {
    down(&resource_2);
    down(&resource_1);
    use_both_resources( );
    up(&resource_1);
    up(&resource_2);
}
```

(b)

Introduction To Deadlocks

Deadlock can be defined formally as follows:

A set of processes is deadlocked if each process in the set is waiting for an event that only another process in the set can cause.


Conditions for Resource Deadlocks

1. Mutual exclusion condition
2. Hold and wait condition.
3. No preemption condition.
4. Circular wait condition.


Deadlock Modeling (1)



(a)



(b)

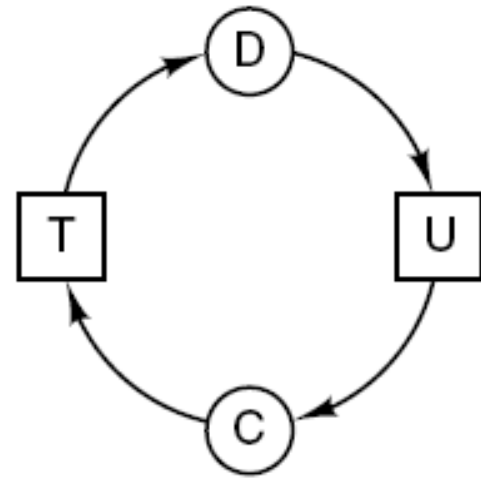

(c)

Figure 6-3. Resource allocation graphs. (a) Holding a resource. (b) Requesting a resource. (c) Deadlock.

Deadlock Modeling (2)

A
Request R
Request S
Release R
Release S
(a)

B
Request S
Request T
Release S
Release T
(b)


C
Request T
Request R
Release T
Release R
(c)

Figure 6-4. An example of how deadlock occurs and how it can be avoided.


Deadlock Modeling (3)

1. A requests R
2. B requests S
3. C requests T
4. A requests S
5. B requests T
6. C requests R
deadlock


(d)




(e)




(f)




(g)



(h)



(i)




(j)


Figure 6-4. An example of how deadlock occurs and how it can be avoided.

Deadlock Modeling (4)


1. A requests R
2. C requests T
3. A requests S
4. C requests R
5. A releases R
6. A releases S
no deadlock




(k)




(l)

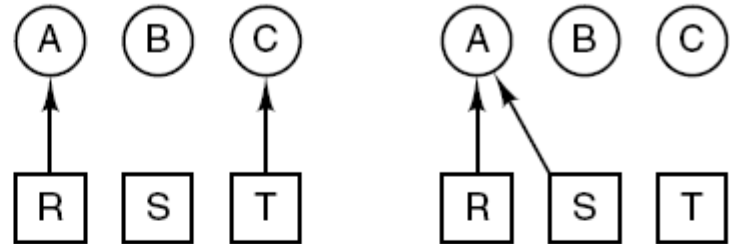


(m)




(n)



(o)



(p)

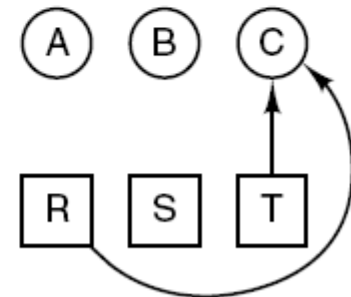

(q)

Figure 6-4. An example of how deadlock occurs and how it can be avoided.

Deadlock Modeling (5)

Strategies for dealing with deadlocks:

1. Just ignore the problem.
2. Detection and recovery. Let deadlocks occur, detect them, take action.
3. Dynamic avoidance by careful resource allocation.
4. Prevention, by structurally negating one of the four required conditions.

Deadlock Detection with Multiple Resources of Each Type (1)

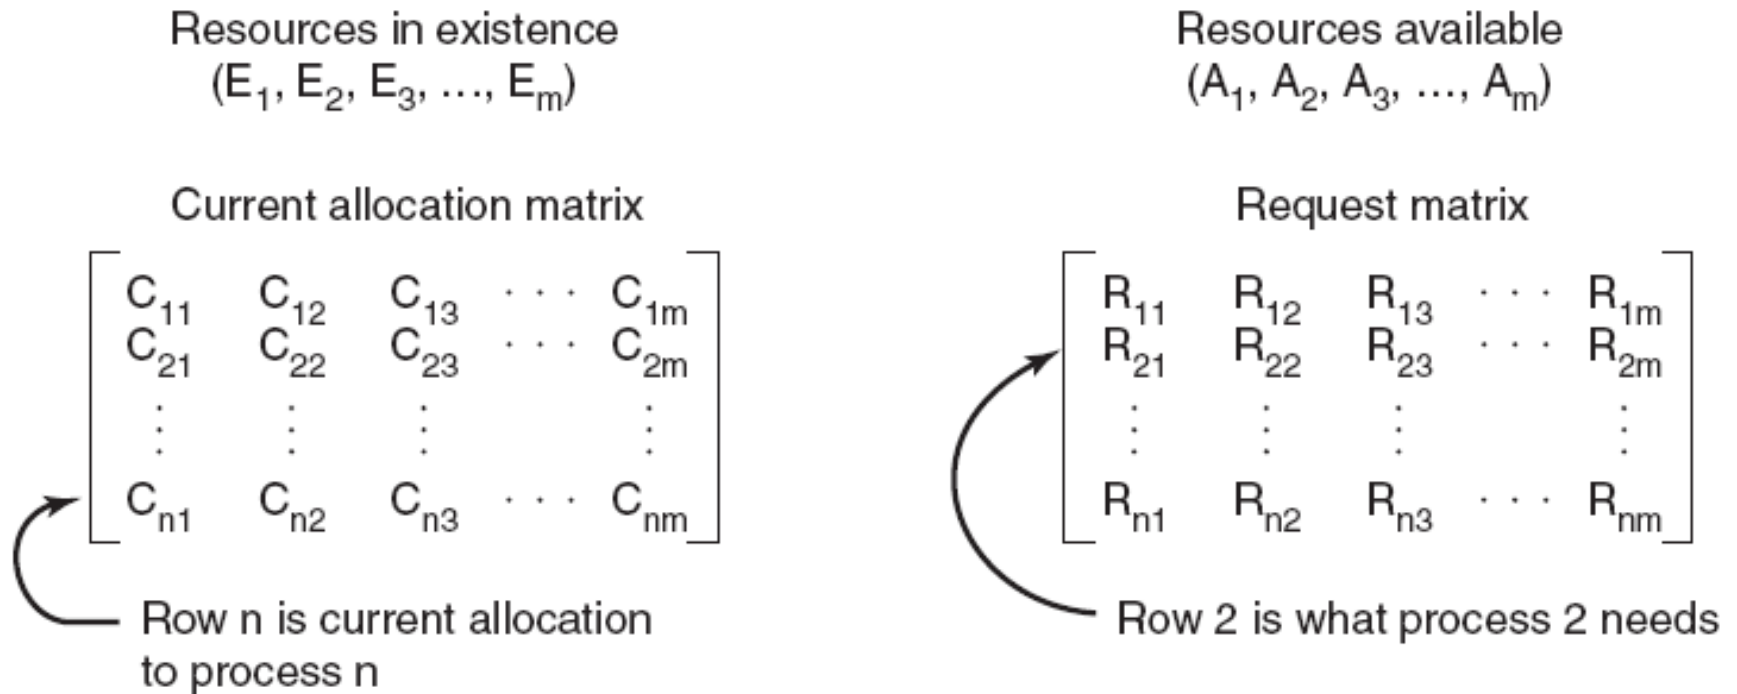


Figure 6-6. The four data structures needed by the deadlock detection algorithm.

Deadlock Detection with Multiple Resources of Each Type (2)

Deadlock detection algorithm:

1. Look for an unmarked process, P_i , for which the i -th row of R is less than or equal to A .
2. If such a process is found, add the i -th row of C to A , mark the process, and go back to step 1.
3. If no such process exists, the algorithm terminates.

Deadlock Detection with Multiple Resources of Each Type (3)

$$E = \begin{pmatrix} 4 & 2 & 3 & 1 \end{pmatrix}$$

Tape drives
Plotters
Scanners
CD Roms

$$A = \begin{pmatrix} 2 & 1 & 0 & 0 \end{pmatrix}$$

Tape drives
Plotters
Scanners
CD Roms

Current allocation matrix

$$C = \begin{bmatrix} 0 & 0 & 1 & 0 \\ 2 & 0 & 0 & 1 \\ 0 & 1 & 2 & 0 \end{bmatrix}$$

Request matrix

$$R = \begin{bmatrix} 2 & 0 & 0 & 1 \\ 1 & 0 & 1 & 0 \\ 2 & 1 & 0 & 0 \end{bmatrix}$$

Figure 6-7. An example for the deadlock detection algorithm.

Recovery from Deadlock

- Recovery through preemption
- Recovery through rollback
- Recovery through killing processes

Safe and Unsafe States (1)

$$E=10$$

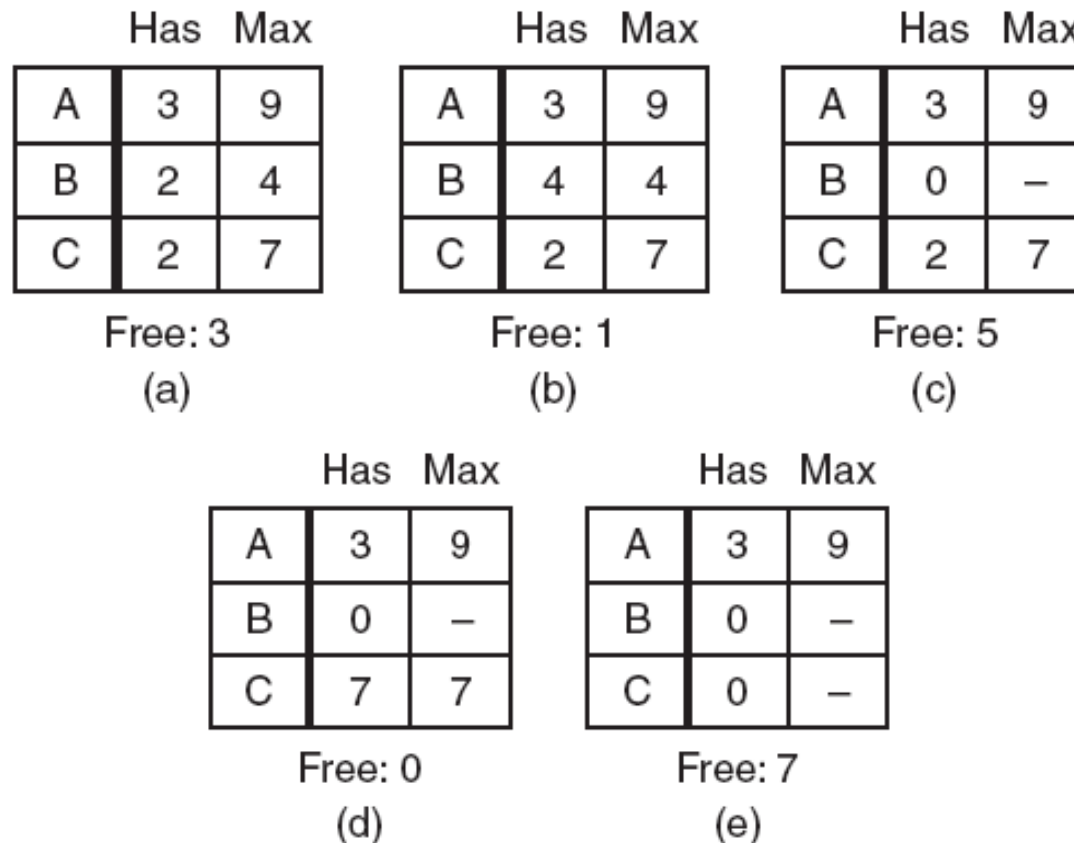


Figure 6-9. Demonstration that the state in (a) is safe.

Safe and Unsafe States (2)

$$E=10$$

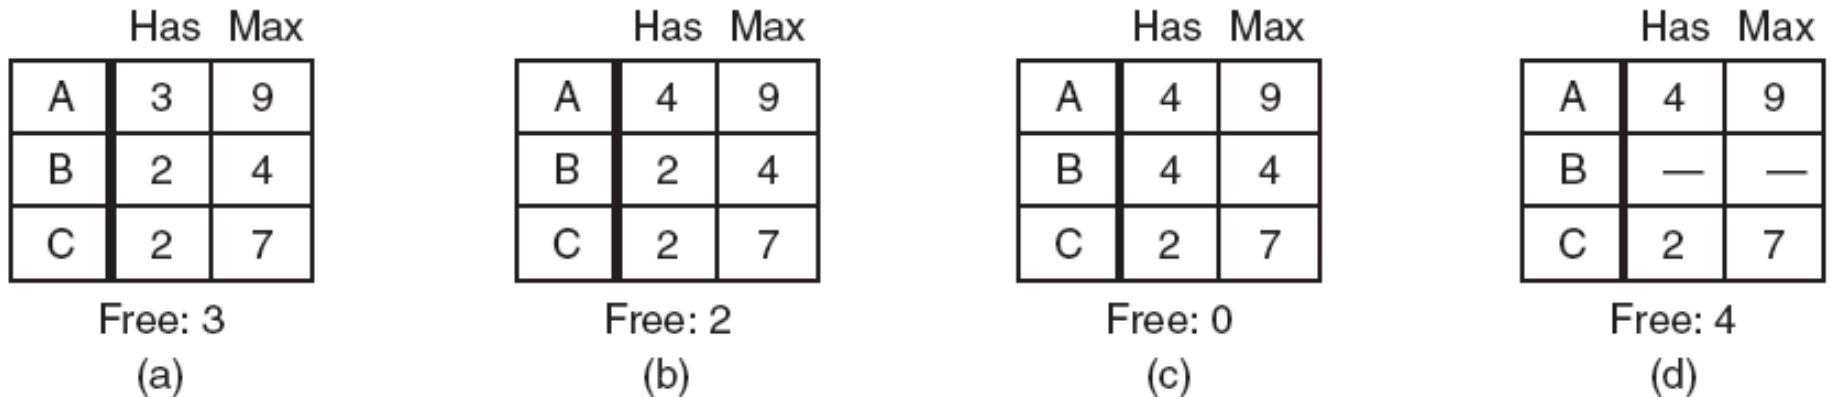


Figure 6-10. Demonstration that the state in (b) is not safe.

The Banker's Algorithm for a Single Resource

$$E=10$$

	Has	Max
A	0	6
B	0	5
C	0	4
D	0	7

Free: 10
(a)

	Has	Max
A	1	6
B	1	5
C	2	4
D	4	7

Free: 2
(b)

	Has	Max
A	1	6
B	2	5
C	2	4
D	4	7

Free: 1
(c)

Figure 6-11. Three resource allocation states:
(a) Safe. (b) Safe. (c) Unsafe.

The Banker's Algorithm for Multiple Resources (1)

Algorithm for checking to see if a state is safe:

1. Look for row, R , whose unmet resource needs all $\leq A$. If no such row exists, system will eventually deadlock since no process can run to completion
2. Assume process of row chosen requests all resources it needs and finishes. Mark process as terminated, add all its resources to the A vector.
3. Repeat steps 1 and 2 until either all processes marked terminated (initial state was safe) or no process left whose resource needs can be met (there is a deadlock).

The Banker's Algorithm for Multiple Resources (2)

	Process	Tape drives	Plotters	Printers	CD ROMs
A	3	0	1	1	
B	0	1	0	0	
C	1	1	1	0	
D	1	1	0	1	
E	0	0	0	0	

Resources assigned

	Process	Tape drives	Plotters	Printers	CD ROMs
A	1	1	0	0	
B	0	1	1	2	
C	3	1	0	0	
D	0	0	1	0	
E	2	1	1	0	

Resources still needed

E = (6342)
P = (5322)
A = (1020)

Figure 6-12. The banker's algorithm with multiple resources.

Deadlock Prevention

- Attacking the mutual exclusion condition
- Attacking the hold and wait condition
- Attacking the no preemption condition
- Attacking the circular wait condition

Other Issues

- Two-phase locking
- Communication deadlocks
- Livelock
- Starvation